

RonaDeck Soft Feel Pool Surround

Resin bound rubber granule surfacing for pedestrian trafficked surfaces



FEATURES

- Permeable
- UV stable—non yellowing resin
- Soft and safe underfoot
- Suitable for pool surrounds and other leisure applications
- Installed by approved contractors
- Slip resistant
- Absorbs impact
- Absorbs noise
- Choice of attractive colours

Description

RonaDeck Soft Feel Pool Surround is a resin bound rubber granule surfacing for pedestrian traffic. It is used to create flexible seamless surfaces which absorb sound and impact.

The open matrix allows water to drain through to the base, reducing water ponding and when used outside, potentially allowing water to flow to natural water courses. A solid edging created from materials such as brick, stone, timber, or steel should be installed as necessary to protect edges.

The system must be laid onto a sound stable and solid base such as concrete, asphalt or onto permeable bases for SuDS compliance.

RonaDeck Soft Feel Pool Surround resin comprises a two component light stable polyurethane resin and a range of selected rubber granules. The design of this resin bound granule system provides a surface which is attractive, safe underfoot, and highly porous.

It's porosity reduces surface ponding of rain and water run-off from surrounding areas, allowing water to drain to natural watercourses or manmade drainage systems. Problems associated with freeze / thaw cycle degradation are also reduced. This is in line with the requirements of Sustainable Drainage Systems Regulations (SuDS).

Traffic

RonaDeck Soft Feel Pool Surround is designed for foot traffic. Vehicle traffic, heavy impact, high point loading and shear, will damage the surface and may result in failure.

Foot Traffic After

24 hours @ 20°C

RonaDeck Soft Feel Pool Surround

Resin bound rubber granule surfacing for pedestrian trafficked surfaces

Resin and Rubber Granules

RonaDeck Soft Feel Pool Surround is UV resistant, it will not yellow on exposure to UV light. This is a more attractive option than other types of resin which can yellow and dramatically alter the appearance of the finished surface.

The performance and appearance of the finished surface is dependent on the rubber granule. The RonaDeck Soft Feel Pool Surround blends have been designed to achieve strength, resilience, porosity and decoration. They can be supplied pre-bagged by Ronacrete Ltd or can be blended on site by the contractor following the guide mixes issued by Ronacrete. It is important that rubber granules independently sourced by the contractor are clean, dust free, dry and properly mixed in their correct proportions.

Appearance

The appearance of samples and of materials supplied by Ronacrete are based on the colour, shade and grading of individual rubber granules supplied to Ronacrete by its suppliers. The appearance may vary from batch to batch.

Maintenance

It is possible to repair localised damage by cutting out and replacing, ideally using the same blend as originally supplied. Ageing and weathering of the original may prevent an invisible repair. "Picking out" of some rubber granules is possible but is likely to be minimal and localised. Any major loss of rubber granules should be reported.

Contractors

RonaDeck Soft Feel Pool Surround is a specialist product and must only be applied by specialist applicators. Do not apply or allow it to be applied by contractors who do not possess the necessary skills and experience.

Sub-base Requirements

Only apply to a suitable substrate which is capable of supporting, restraining and bearing the weight of the traffic load. The best substrate is a well designed and constructed concrete, asphalt or macadam. Application to other surfaces may result in failure. If you are unsure of the substrate and its suitability to receive RonaDeck Soft Feel Pool Surround, do not proceed. RonaDeck Soft Feel Pool Surround is a thin layer of 15mm minimum thickness or more. It may therefore mirror and reflect any surface unevenness. Substrates should therefore be levelled or smoothed prior to application to avoid this. The substrate must be completely dry and free from any contamination for example, grease or oil.

Construction of base for pedestrian traffic

From base upwards, construction is typically 50 -100mm of well compacted non-frost susceptible Type 1 sub-base to DoT Clause 803, followed by 40mm of 14mm close graded asphalt or macadam surface wearing course which has been laid to a fall of not less than 1% to allow for good drainage and water run-off. The surface must be smooth and flat. Alternatively apply to sound well constructed

Resin Bound and Bonded Surfacing

Continued on following page...

RonaDeck Soft Feel Pool Surround

Resin bound rubber granule surfacing for pedestrian trafficked surfaces

Construction of base for pedestrian traffic (continued) and smooth concrete substrate. The base should be sound, clean and dry. New tarmac surfaces must be allowed to cool and gain strength for not less than 24 hours at 20°C. Ronacrete's Technical Department will be pleased to discuss permeable substrates.

Mix Design and Coverage	RonaDeck Soft Feel Pool Surround Resin Rubber Granules	10kg 50kg
	Coverage per 60kg mix	3.80m² @ 15mm (approx) 2.85m² @ 20mm (approx)
Coverage is theoretical and will vary when applied to undulating surfaces and according to compaction. This can also vary from batch to batch. Coverage rates can be assessed by practical trials on representative areas of structure and these are recommended in all situations.		

- Instructions for Use**
1. Only use clean, dried and dust free, rubber granules which is suitable for this use.
 2. Ensure that the mixing station is fully waterproof when rain is expected, discontinue mixing when fog or mist are anticipated. Light rain on the surface of the system is unlikely to damage or affect the surface, see later reference to application in rainy conditions.
 3. Only apply to a sound base.
 4. Place 50kg of rubber granules into a clean, dry, forced action mixer, the mixer capacity must be no less than 120 litres.
 5. Scrape all of the contents of Part B in to Part A and mix immediately with a drill and helical paddle mixer attachment for 30-45 seconds. Keep mixing time to a minimum to reduce heat generation which will reduce working time.
 6. Immediately add the mixed resin to the rubber granules in the mixer. Mix the rubber granules and resin together until all the aggregate is evenly coated with resin. Keep mixing time to a minimum to reduce heat generation which will reduce working time.
 7. Discharge the mix onto the prepared surface, level and smooth. Excessive compaction will reduce permeability.
 8. Finish the surface with a suitable (metal) float and ensure that the surface is completely flat. Avoid excessive use of the float as this may cause the surface to be picked up. Protruding rubber granules will tear and damage the system. Lightly wetting the float with RonaDeck Resin Trowel Finishing Aid will assist in achieving a smooth surface finish.
 9. Allow to cure. At 20°C protect against rain damage for 1 - 2 hours (see Rain During Application) and open to traffic as described in Traffic

Slip Resistance All RonaDeck Soft Feel Pool Surround rubber granule blends have been tested for slip resistance in accordance with BS 8204 Part 6. All blends achieved 'low potential for slip' in both wet and dry conditions.


RonaDeck Soft Feel Pool Surround

Resin bound rubber granule surfacing for pedestrian trafficked surfaces

Working Temperatures	<p>RonaDeck Soft Feel Pool Surround Resin is rapid setting and rapid curing. It's pot life and working time is affected by temperature including material, air and substrate temperature. At temperatures above 25°C the pot life and working time may be insufficient to allow its proper application.</p> <p>Work should therefore not proceed when product, air or substrate temperature exceed 25°C. The temperature of concrete and macadam will generally be higher than the air temperature. The temperature of the substrate must therefore be measured and monitored during application and work should stop when temperature is above 25°C. At low temperatures the resin will not flow sufficiently to achieve a smooth finish and work should not proceed when air, material or substrate temperature is below 5°C. The surface must not be trafficked until it has gained sufficient strength.</p>
Rain During Application	<p>Light rain on the surface of the system is unlikely to cause damage to or affect the surface. Heavy rain is likely to spoil the appearance of the surface and very heavy rain may cause failure. Therefore application during rain or when rain is anticipated during the cure period is not recommended. Note that application to a damp substrate will reduce bond strength. Unmixed granules must be kept dry at all times.</p>
Shelf Life and Storage	<p>Shelf life of RonaDeck Soft Feel Pool Surround Resin is 6 months. Rubber granules have a longer shelf life. Store materials in clean, dry, frost free warehouse conditions between 5°C and 25°C. Protect from sunlight</p>
Health and Safety	<p>Refer to Safety Data Sheet.</p>
Site Attendance	<p>When on site Ronacrete representatives are able, if asked, to give a general indication of the correct method of installing a Ronacrete product. It is important to bear in mind that Ronacrete Ltd is a manufacturer and not an application contractor and it is therefore the responsibility of the contractor and his employer to ensure he is aware of and implements the correct practices and procedures to ensure the correct installation of the product and that liability for its correct installation lies with the contractor and not with Ronacrete Ltd.</p>

RonaDeck Soft Feel Pool Surround

Resin bound rubber granule surfacing for pedestrian trafficked surfaces

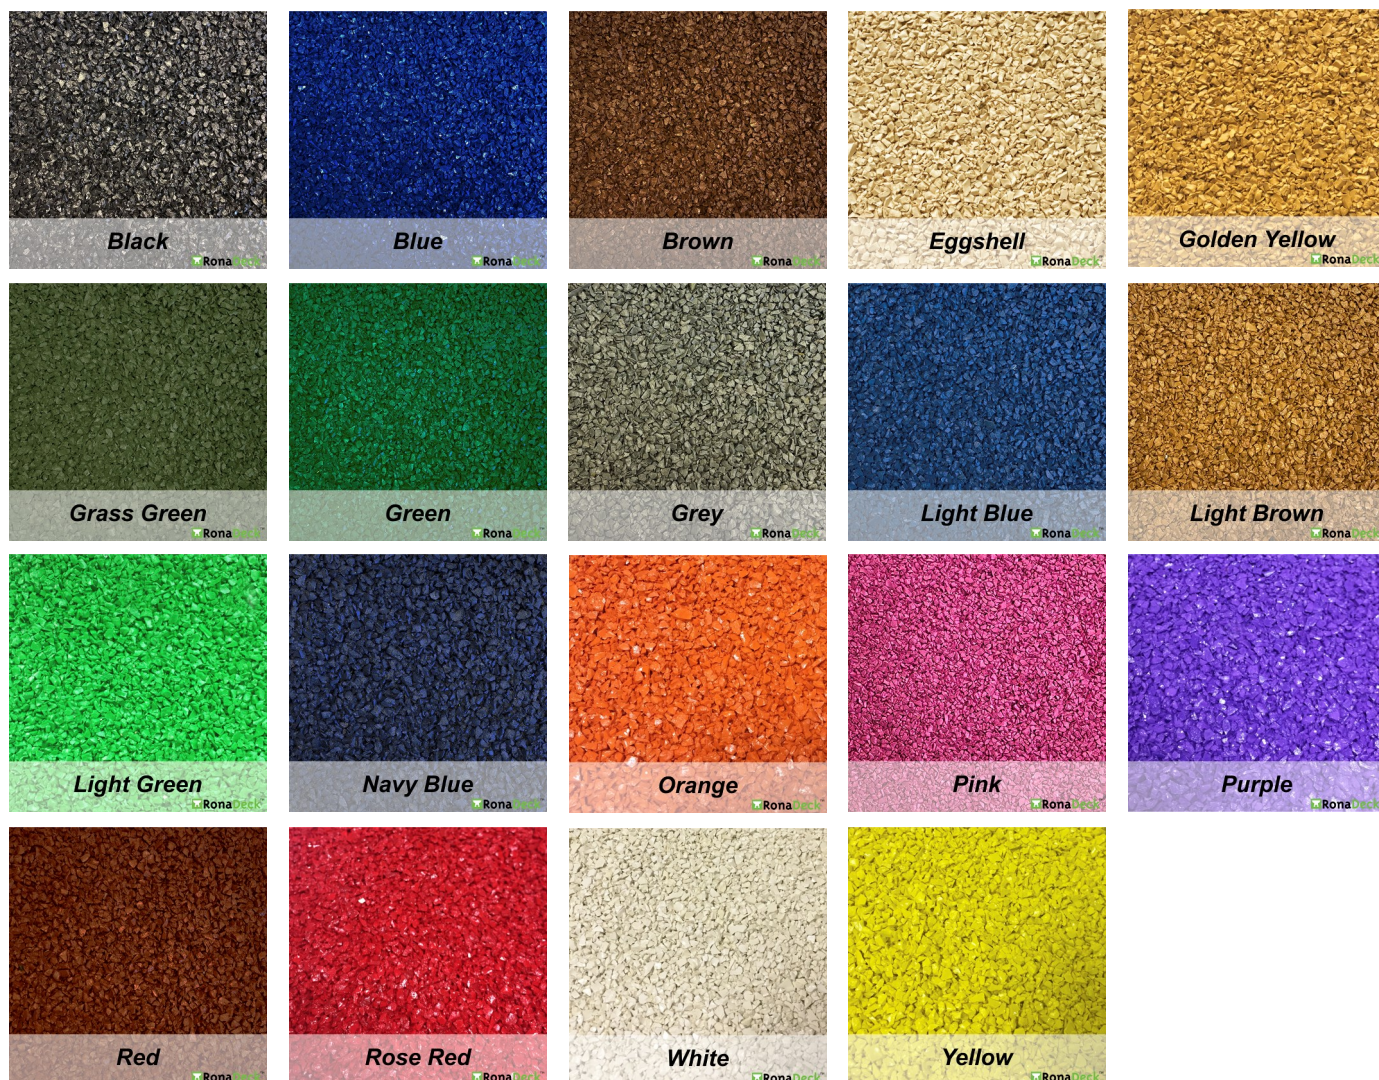

Please note that all efforts have been made to get these swatches as close to the finished items as possible but due to limitation in the printing process accuracy is not guaranteed. We advise that cured samples are ordered before making a decision.

The information detailed in this leaflet is liable to modification from time to time in the light of experience and of normal product application, and before using, customers are advised to check with Ronacrete Ltd, quoting the reference number, that they possess the latest issue. Any person or company using the product without first making further enquiries as to the suitability of the product for the intended use does so at his own risk, and Ronacrete Ltd can accept no responsibility for the performance of the product, or for any loss or damage arising out of such use.

Resin Bound and Bonded Surfacing

Ronacrete

RONL 733 Issue 7 6th February 2018

Ronac House, Flex Meadow, Harlow, Essex CM19 5TD, U.K.
Tel: +44 (0)1279 638700 www.ronacrete.co.uk technical@ronacrete.co.uk