




RonaDeck

EcoPath Surfacing

PATHWAYS - SuDS Compliant*

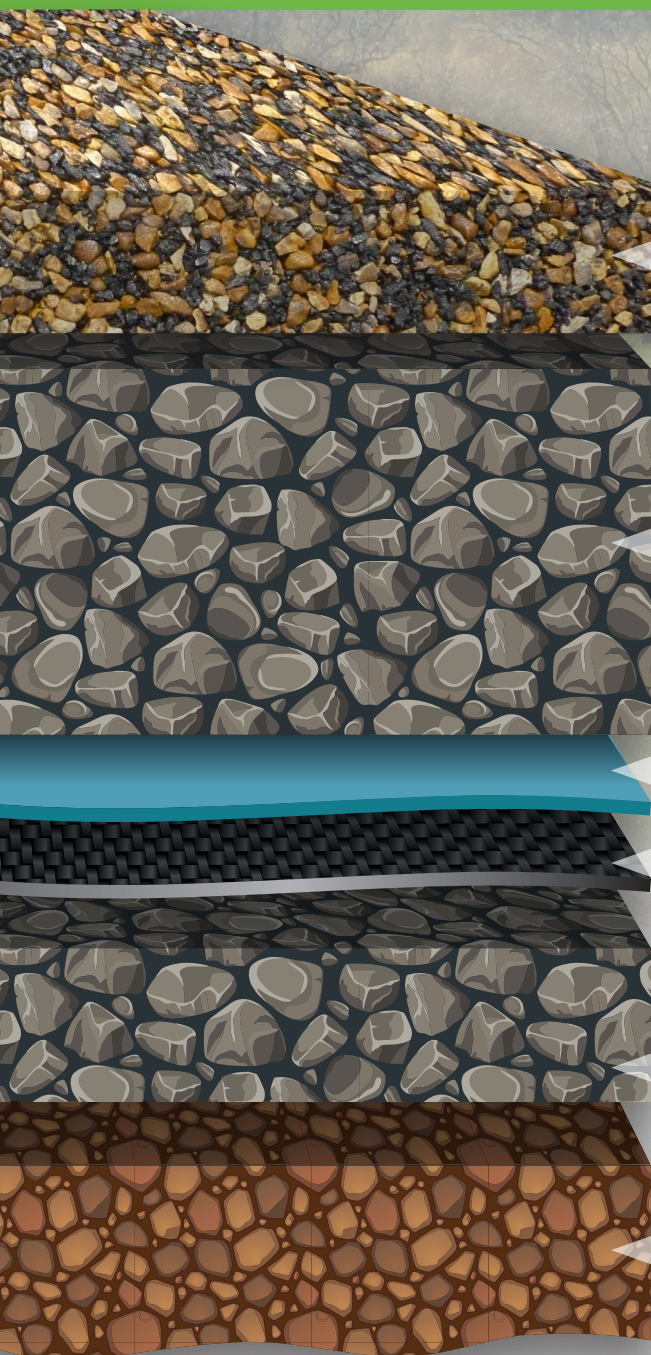

ECO PATH SURFACING

35mm minimum depth of RonaDeck EcoPath UV vulcanised rubber granules and natural aggregate bound with RonaDeck EcoPath UV Resin.

GRANULAR SUB-BASE

150mm minimum well compacted Type 3 granular sub-base or similar approved – depth dependent on site drainage conditions.

IMPERMEABLE MEMBRANE (Optional)

Impermeable membrane to carry water to infiltration/storage system or soakaway when drainage is poor

OR

GEOTEXTILE LAYER (Optional)

CAPPING LAYER

If required, depending on sub-grade condition.

SUB-GRADE



Ronacrete, Ronac House, Flex Meadow, Harlow, Essex CM19 5TD UK
Tel: +44 (0) 1279 638700 E-mail: tech@ronacrete.co.uk

*Please refer to the technical data sheet on the Ronacrete website before using or specifying Ronacrete products.

