



RonaDeck


Soft Feel Pool Surround

POOL SURROUND - SuDS Compliant*




SOFT FEEL SURFACING

15mm minimum depth of RonaDeck Rubber Granules (EPDM) bound with RonaDeck Soft Feel Pool Surround Resin.

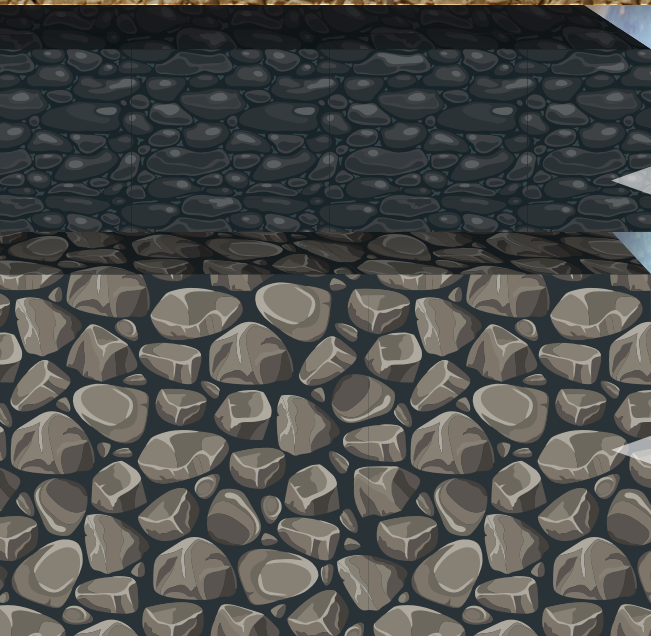


BINDER COURSE

50mm minimum depth of AC14 open graded asphalt concrete (macadam) maximum 100/150 pen binder to BS EN 13108-1.

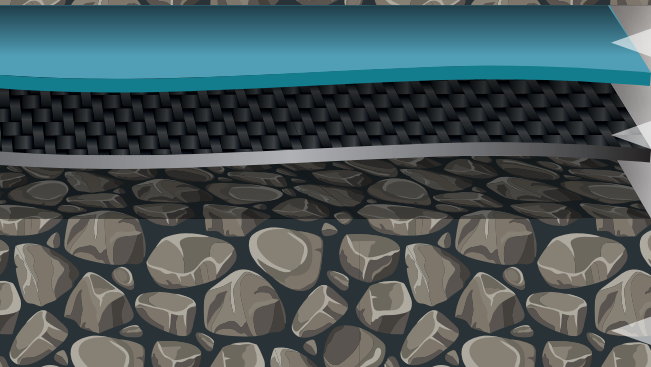

GRANULAR SUB-BASE

150mm minimum well compacted Type 3 granular sub-base or similar approved – depth dependent on site drainage conditions.

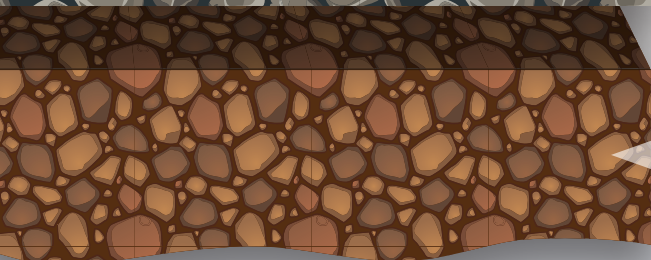

IMPERMEABLE MEMBRANE (Optional)

Impermeable membrane to carry water to infiltration/storage system or soakaway when drainage is poor

OR

GEOTEXTILE LAYER (Optional)

CAPPING LAYER

If required, depending on sub-grade condition.

SUB-GRADE



Ronacrete, Ronac House, Flex Meadow, Harlow, Essex CM19 5TD UK
Tel: +44 (0) 1279 638700 E-mail: tech@ronacrete.co.uk

*Please refer to the technical data sheet on the Ronacrete website before using or specifying Ronacrete products.

